


TECHNICAL DATA SHEET

ReoCo 65/35-HT

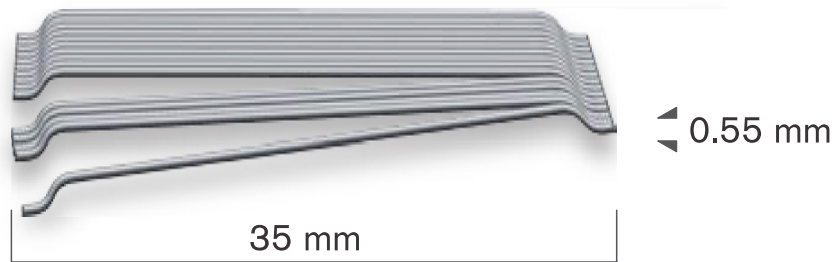

Product Description

ReoCo 65/35-HT is a high tensile fibre engineered to provide superior results for crack control and reinforcement.

ReoCo 65/35-HT is a Type 1, cold drawn high tensile, hook-end fibre that is suitable for a range of concrete applications.

Applications

- Shotcrete applications in mining, tunnelling and civil projects
- High load concrete slab on ground applications in warehousing, mining and workshops
- Suspended slabs (supported)
- Infrastructure (roundabouts)
- Replacement of structural steel

Features

- Degradable glue collated fibres
- Round wire, hook ends
- Bright low carbon steel wire
- Degradable bag

Benefits

- Easy to use & high performance
- Even dispersing throughout concrete mix
- Saves the contractor time and money
- Improves site safety
- Superior crack control to conventional methods
- Degradable bag means less handling and wastage

Dimensions

- Length: 35mm
- Diameter: 0.55mm
- Aspect ratio (l/d): 65
- Quantity of fibres: 15,031 fibres/kg
- Shape: Round

Properties

- Tensile strength: 1,800 MPa
- Young's Modulus: 210 GPa
- Specific gravity: 7.93

Compliance



Certificates



Packaging/Storage

- 10kg/20kg bags (100 bags per pallet).

